# IS7025si

The IS7025si is a popular slim-line, door frame perimeter seal, designed to be fitted to an existing door stop, around the head and jambs of single swing doors.

The aluminium carrier has fixing holes pre-drilled and slotted to allow the seals to be adjusted and positioned accurately.
A decorative cover strip is supplied to conceal these fixings.

## Gap size

- Min. 0mm / max. 6mm

## Door set standard lengths

- Single: 1 x 1000mm, 2 x 2100mm
- Long Single: 1 x 1000mm, 2 x 2750mm
- Double: 3 x 2100mm
- Long Double: 1 x 2100mm, 2 x 2750mm

## Standard lengths

- 1000mm
- 2250mm
- Also available in: 250mm increments from 100mm to 5000mm

## Standard colours


- Silver anodised aluminium with grey silicone gasket and grey cover strip
- Black anodised aluminium with black silicone gasket and black cover strip


## Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- UL Certifications GVYI.R26629, GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7, compliant with AS6905 on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2

## Features

- Ambient (cold) temperature smoke control
- Medium temperature smoke containment (200°C)
- Approved for use on proprietary smoke doors
- Approved for use on proprietary fire doors
- Antimicrobial version available
- Sound containment (acoustics)
- Energy efficient

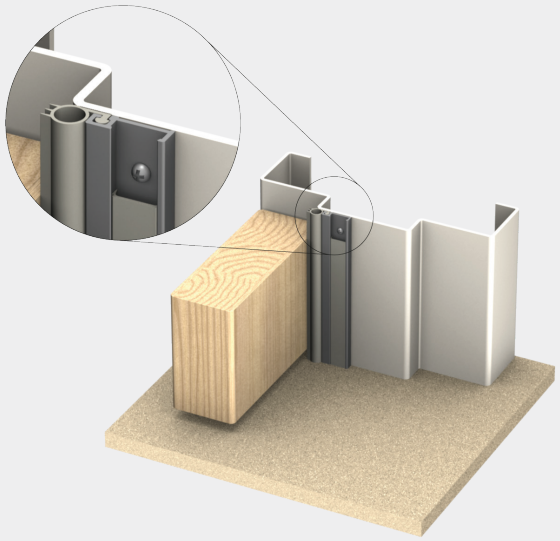

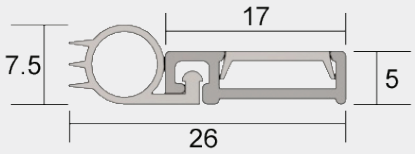


IS7025si

All seals proudly manufactured in Australia



15 Wentworth Pl, Banyo QLD 4014, Australia
P +61 7 3635 5000 F +61 7 3861 9266 E sales@kilargo.com.au W kilargo.com.au