
DROP SEALS


LAS8008 si

FACE-FIXED **30dB**

A slimline face-fixed automatic drop seal with a curved cover plate for enhanced aesthetics. It features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres; resulting in lower door operating forces. Requires no power connection. Self-levelling on uneven floors, seal height can be adjusted independently of fixing screws. Suitable for upgrading existing doors.

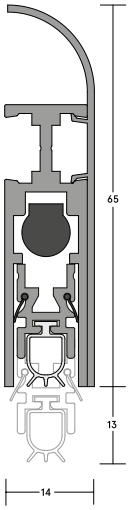

LAS8008 si

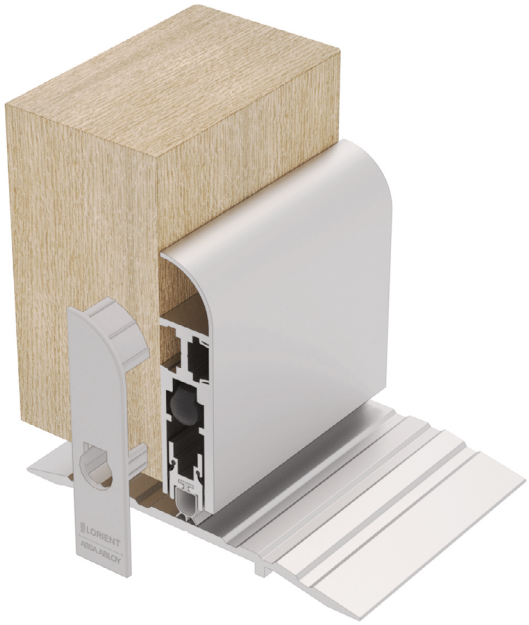

LAS8008 si (shown with LAS4011)

SYSTEM SPECIFICATIONS

Test evidence
- Fire: BS EN 1634-1:2014 + A1:2018 (FD30 & FD60).
- Smoke: BS EN 1634-3:2004 at ambient temperature; BS 476-31.1:1983.
- Acoustic: BS EN ISO 10140-2: 2010 (up to Rw 30dB).

Characteristics
- Contributes towards sound, smoke, draught, and light containment.
- Suitable for wheeled traffic.

Location
- Single swing, single and double leaf doors.
- For use on both right and left handed doors.

Use with
- Any perimeter seal. Any threshold plate.

Min/max gap size
1mm/13mm.

Seal material
- Grey silicone rubber.

Standard lengths
- 335mm, 435mm, 535mm, 635mm, 735mm, 835mm, 935mm, 1035mm, 1135mm and 1235mm.
- Note: Each length can be cut back to the next size down. The 335mm can be cut back to 255mm.

Fixing
- Fixing screws are supplied, holes should be drilled at time of fixing. LAS8008 si is face-fixed only.

Adjustment
- Self-levelling on uneven surfaces. Can be adjusted independently of the fixing screws.
- Please note: Drop seals under 635mm are supplied with a single spring and will only operate once fully fitted and in use.

Finishes
- Silver anodised aluminium with grey end caps and grey silicone rubber gasket as standard.
- Black end caps, and black silicone rubber gasket (non-standard - charges, MOQS and additional lead times).

T: +44 (0)1626 834252
E: mktg@lorientuk.com

LORIENT
ASSA ABLOY