PERIMETER SEALS


LAS1007 Single Batwing®

MEDIUM DUTY **34dB**

The LAS1007 Single Batwing® Seal is a smoke and acoustic perimeter seal for fire-rated steel-based door assemblies / doorsets. Its 14mm high, single fin design creates a tight seal while minimising the force required to open and close the door. Made from a flexible elastomeric material, the fin springs back into shape after every use, ensuring long-lasting performance. Easy to install with minimal disruption, the LAS1007 is suitable for both single and double leaf doors on the head and jambs.



LAS1007
Single
Batwing®

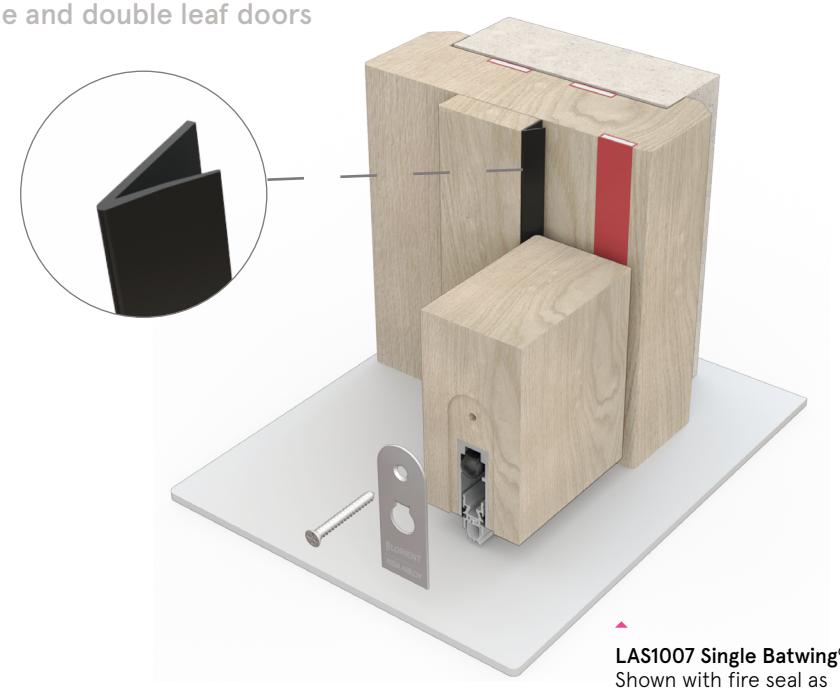

LAS1007 Single Batwing®
Shown with fire seal as referenced in CNA/F14171 (also shown with LAS8001 si)

SYSTEM SPECIFICATIONS

Test evidence
- Smoke: BS 476-31.1: 1983 at ambient temperature; BS EN 1634-3:2004 at ambient temperature.
- Acoustic: BS EN ISO 10140-2: 2010 (up to Rw 34dB).
- Durability: 100,000 cycles.

Characteristics
- Protects against sound, smoke, draught and light.
- Suitable for use of fire rated steel doorsets.

Location
- Head and jambs of single and double leaf doors.

Use with
- Practically any drop seal.

Min/max gap size
- 3mm/4mm.

Seal material
- Co-extruded rigid back PVC with flexible fins.

Standard lengths
- 1m and 2.1m.
- Single doorset pack consisting of 1 x 1m and 2 x 2.1m.
- Other lengths to special order.

Fixing
- Supplied with strong self-adhesive tape, tested on many surfaces, including MDF – suitable for internal use only.

Colours
- Black, white, dark brown, light brown and grey as standard.
- Cream, red and clear are subject to MOQs.
- Note: clear Batwing® will not prevent light penetration.

Certifications
certifire (CF5179)
(R27972)

T: +44 (0)1626 834252
E: mktg@lorientuk.com

LORIENT
ASSA ABLOY