
DROP SEALS


LAS8004 si

MORTISED

A mortised, automatic 'flat back' drop seal to suit installation to metal door rails. It features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres; resulting in lower door operating forces. Requires no power connection. Self-levelling on uneven floors; seal height can be adjusted independently of fixing screws.



LAS8004 si

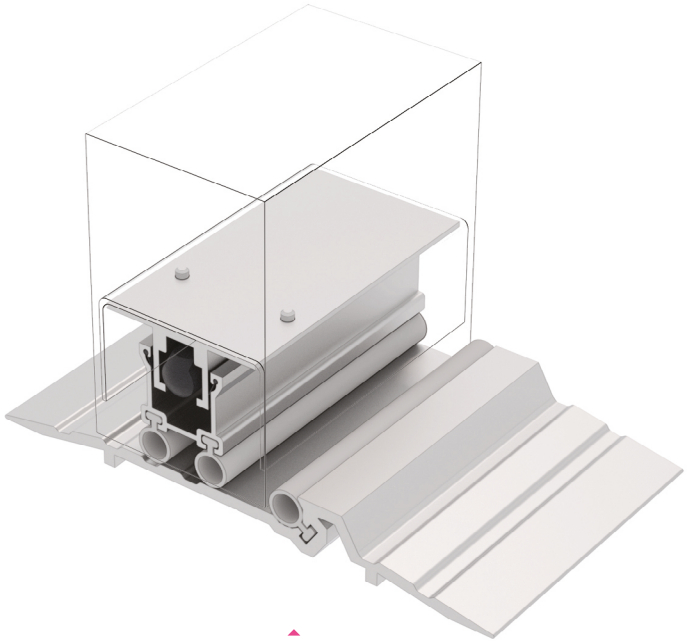

LAS8004 si
(shown with LAS4014 si)

SYSTEM SPECIFICATIONS

Test evidence
- Fire: BS EN 1634-1:2014 + A1:2018 (FD120)
- Smoke: BS 476-31.1:1983 at ambient temperature.
- Durability: 100,000 cycles.

Characteristics
- Suitable for use on fire rated steel based door assemblies.
- Contributes towards sound, smoke, draught, and light containment.
- Suitable for wheeled traffic.

Location
- Single swing, single and double leaf doors.
- Can be used on either right or left handed doors.

Use with
- Any threshold plate.

Min/max gap size
- 1mm/13mm.

Seal material
- Grey silicone gasket.

Standard lengths
- 635mm, 735mm, 835mm, 935mm, 1035mm, 1135mm and 1235mm.
- Note: Each length can be cut back to the next size down. The 635mm can be cut back to 535mm. Other lengths to special order.

Fixing
- Fixing screws are supplied, fixing holes are pre-drilled.

Adjustment
- Self-levelling on uneven surfaces. Can be adjusted independently of the fixing screws.
- Please note: Drop seals under 635mm are supplied with a single spring and will only operate once fully fitted and in use.

Finish
- Silver anodised aluminium with grey gaskets.

Certification
certifire (CF5179)

CLASSIFIED UL (R27972)

T: +44 (0)1626 834252
E: mktg@lorientuk.com

LORIENT
ASSA ABLOY