
LAS1011 & LAS1016 Firtree™


KERF-FIT

Highly effective acoustic seals, which also provide additional cold smoke protection around the perimeter of fire rated doors. Flexible and durable. They can be fitted with minimal disruption to the door assembly.



LAS1011
Firtree™

LAS1016
Firtree™ 6mm

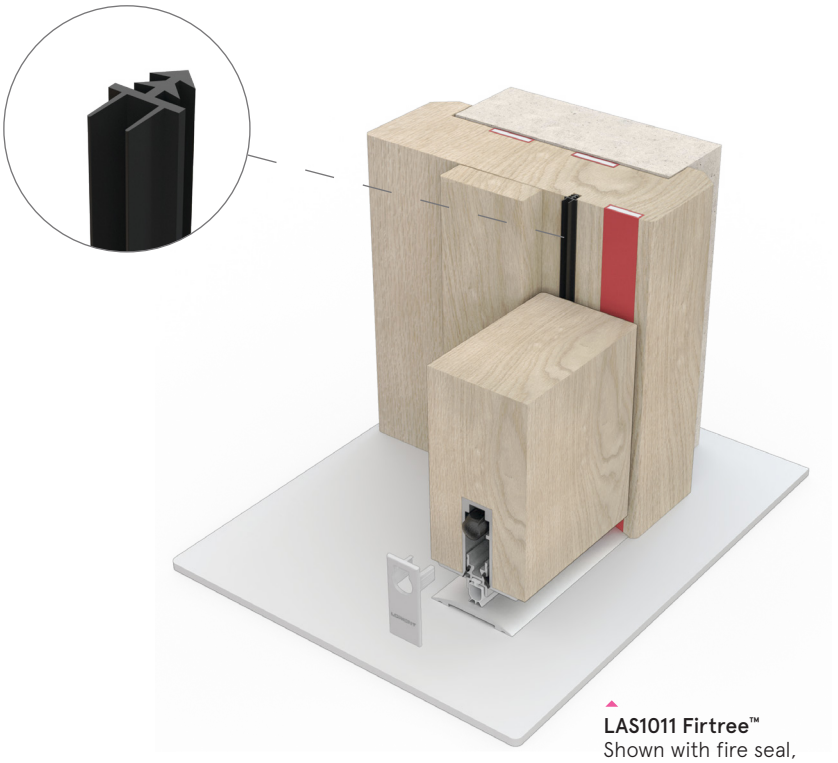

LAS1011 Firtree™
Shown with fire seal, LAS8005 si drop seal & LAS4002 threshold plate

SYSTEM SPECIFICATIONS

Test evidence
- Smoke: BS 476-31.1: 1983 at ambient temperature.
- Acoustic: BS EN ISO 10140-2:2010 (up to Rw 40dB).
- Durability: 100,000 cycles.

Characteristics
- Protects against sound, smoke, draught and light.

Location
- Head and jambs of single and double leaf doors. May also be used at the threshold when combined with a threshold plate.

Use with
- Any fire seals or architecturals seals.

Min/max gap size
- 3mm/4mm (LAS1011).
- 4mm/6mm (LAS1016).

Seal material
- Co-extruded rigid back PVC with flexible fins.

Standard lengths
- 1m and 2.1m. Other lengths to special order.

Fixing
- Groove size is 3mm x 4mm.

Colours
- Black or white as standard.
- Dark brown and light brown are subject to MOQs.

Certification

certifire
(CF5179) LAS1011

(R27972)
LAS1011