
DROP SEALS

LAS8007 si

MORTISED 39dB

A mortised automatic drop seal. It features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres; resulting in lower door operating forces. Requires no power connection. Self-levelling on uneven floors; seal height can be adjusted independently of fixing screws. This is a fully-mortised version of LAS8006 si.

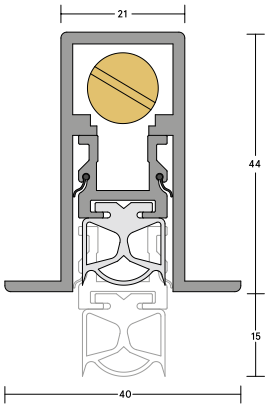

LAS8007 si



LAS8007 si (shown with LAS4011)

SYSTEM SPECIFICATIONS

Test evidence
- Smoke: BS 476-31.1:1983 at ambient temperature.
- Acoustic: BS EN ISO 10140-1:2010+A2: 2014 (Annex J) up to Rw 39dB.

Characteristics
- Contributes towards sound, smoke, draught, and light containment.
- Suitable for wheeled traffic.

Location
- Single swing, single and double leaf doors.
- For use on both right and left handed doors.

Use with
- Any perimeter seal. Any threshold plate.

Min/max gap size
- 1mm/15mm.

Seal material
- Black or grey silicone rubber.

Standard lengths
- 335mm, 435mm, 535mm, 635mm, 735mm, 835mm, 935mm, 1035mm, 1135mm and 1235mm.
- Note: Each length can be cut back to the next size down. The 335mm can be cut back to 275mm.

Fixing
- Fixing screws and end caps are supplied.
- Fixing holes are pre-drilled through the flanges.

Adjustment
- Self-levelling on uneven surfaces - can be adjusted independently of the fixing screws.

Finishes
- Silver anodised aluminium with grey end caps and grey silicone rubber gasket as standard.
- Black end caps, and black silicone rubber gasket (non-standard - charges, MOQS and additional lead times).

Certification

(R27972)

T: +44 (0)1626 834252
E: mktg@lorientuk.com

LORIENT
ASSA ABLOY